

MODEL ECLIPSE
DESIGN DORIGO DESIGN
ITEM CODE ECLAQ / ECLBQ

IMAGE




FINISHING

Upholstery Available In Fabric or Leather
 Available C.O.M. / C.O.L.

Required Fabric For Upholstery: 0,90 Lnm
 Required Leather For Upholstery: 1,40 Sqm

Gross Weight Kg: 21,00
 Volume Cbm: 0,34
 Box Dimensions: w 750 x d 710 x h 450/790
 1 per box

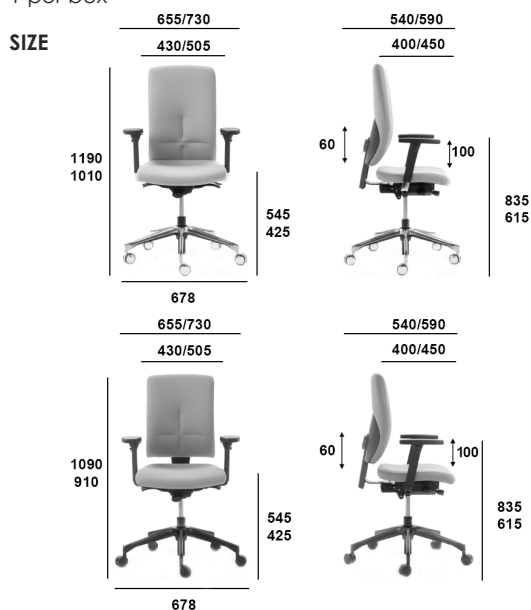

STANDARD FEATURES

INNER FRAME

Seat & Back made of double radius stratified curved beech plywood, warm shaped, 14 mm thickness

PADDING

Polyurethane resin ELAST PERFORMANCE characterized by "smart memory", that allows the armchair to recover the initial support even after long and strong pressure. Seat density 40 kg/mc EM 5 mm thickness. Back density 35 kg/mc SE elastic non-deformable. Wadding with 280 gr/cm density. CFC-free

REAR BACK

Back cover in plastic metallized non-reflecting in colour grey anthracite 69/4 antiscratch and crushproof, with an elegant leaf pattern

BASE

Swivel base, five-spoke, polished aluminium, 678mm diameter (Lead is present in the aluminum to a lesser extent <0.20%. The aluminum used complies with 2005/95/CE, 2002/69/CE and 2003/108/CE). Recyclability 100%. Available in black nylon & fiber glass. Design Hans Thyge

WHEELS

Ø 60 mm Support Chrome, Tyre Black, Discs Chrome Without Brake, with Chrome ABS side discs, suitable for any type of flooring, thanks to the polyurethane rubber.

SEAT MECHANISM

Synchro mechanism with 4 locking positions back (+2° in operative version -20° in rest position). Security back system "anti-shock". Equipped with lever for the regulation of the back and seat height and with hand wheel for the regulation of the tilting intensity on the basis of the weight of a person. Mechanism for the regulation of the depth of the seat, with possibility of locking in 5 positions, Total adjustable slide 80 mm

GAS LIFT

Pneumatic seat height adjustment, Gas lift column, CLASS 4 DIN 455, black epoxy-polyester powder coating

ARMRESTS

Multifunctional die-cast polished aluminium arm 12° forward - adj. 4d. 100 mm height adjustment by the button, pad rotation in three positions or 180° by the button, 40 mm Pad translation, 45 mm width regulation. Depth adjustment 25 mm extension more by each side. soft touch arm-pad.

BACK

Back with steel blade thickness 7 mm. Hand wheel located in the rear back for the regulation of the lumbar support, adjustable sliding system 60 mm

OTHERS

-Stitching's Are Made With Continuous Filament Polyester Thread With A Water Repellent Finish Made By Coats® Type Weaverbird™ This Type Of Lubricated Polyester (Tkt 010) Thread Make The Stitching Stronger, Resistant To The Abrasion, And Gives The Product More Tailoring Appearance. Allowing To Read The Forms And Design Of The Product
 -All screws and assembly systems used in the production of Sitia's product are UNI EN ISO 9001-2000 and UNI ISO/TS 16949 process certified